



CARBIDE

Being the best through innovation



JET-POWER

- 不锈钢，镍合金和钛等难加工材料

Exotic materials like Stainless Steels, Nickel alloys and Titanium

SELECTION GUIDE

项目 ITEM	型号 MODEL	规格 DESCRIPTION	尺寸 SIZE		页 PAGE
			最小 MIN	最大 MAX	
EH911 EH912		硬质合金, 2刃 35度螺旋角 短刃 CARBIDE, 2 FLUTE 35° HELIX SHORT LENGTH	D1.0	D25.0	696
EH913 EH914		硬质合金, 4刃 35度螺旋角 短刃 CARBIDE, 4 FLUTE 35° HELIX SHORT LENGTH	D2.0	D25.0	697
EH830 EH840		硬质合金, 3&4刃 50度螺旋角 长刃 CARBIDE, 3&4 FLUTE 50° HELIX LONG LENGTH	D6.0	D25.0	698
EH915 EH916		硬质合金, 6&8刃 45度螺旋角 长刃(正前角) CARBIDE, 6&8 FLUTE 45° HELIX LONG LENGTH (Positive Rake Angle)	D6.0	D25.0	699
EE515		粉末高速钢, 4&6刃 短刃 PREMIUM HSS-PM, 4&6 FLUTE SHORT LENGTH	D3.0	D25.0	700
EH852 EH862		硬质合金, 多刃 短刃 粗加工 - 细螺紋 CARBIDE, MULTI FLUTE SHORT LENGTH ROUGHING - FINE	D6.0	D25.0	701
EH831 EH841		硬质合金, 多刃 长刃 粗加工 - 细螺紋 CARBIDE, MULTI FLUTE LONG LENGTH ROUGHING - FINE	D6.0	D25.0	702
EH917 EH918		硬质合金, 多刃 45度螺旋角 短型 粗加工 - 细螺紋 CARBIDE, MULTI FLUTE 45° HELIX SHORT LENGTH ROUGHING - FINE	D6.0	D20.0	703
EH919 EH920		硬质合金, 多刃 45度螺旋角 长刃 粗加工 - 细螺紋 CARBIDE, MULTI FLUTE 45° HELIX LONG LENGTH ROUGHING - FINE	D4.0	D25.0	704
EH921 EH942		硬质合金, 多刃 45度螺旋角 长刃 粗加工 - 细螺紋 CARBIDE, MULTI FLUTE 45° HELIX LONG REACH ROUGHING - FINE	D6.0	D20.0	705
推荐的切削条件 RECOMMENDED CUTTING CONDITIONS					706

JET-POWER END MILLS

◎ : 优(Excellent) ○ : 良(Good)

碳钢	合金钢	预硬钢	硬化钢		高硬钢	铜	石墨	铸铁	铝	不锈钢	钛	铬镍铁合金
Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels		High Hardened Steels	Copper	Graphite	Cast Iron	Aluminum	Stainless Steels	Titanium	Inconel
~HB225	HB225~325	HRc30~40	HRc40~45	HRc45~55	HRc55~70							
○	◎	◎	○							○	○	
○	◎	◎	○							◎	◎	
○	◎	◎	○							◎	◎	○
○	◎	◎	○							◎	◎	○
○	◎	◎	○							◎	◎	○
○	◎	◎	○							◎	◎	○
○	◎	◎	○							◎	◎	○
○	◎	◎	○							◎	◎	○
○	◎	◎	○							◎	◎	○
○	◎	◎	○							◎	◎	○
○	◎	◎	○							◎	◎	○
○	◎	◎	○							◎	◎	○



EH911 SERIES


PLAIN SHANK

EH912 SERIES

FLAT SHANK

硬质合金, 2刃 35度螺旋角 短刃
CARBIDE, 2 FLUTE 35° HELIX SHORT LENGTH

- ▶ 超微粒硬质合金
- ▶ 减少了角边处的崩刃
- ▶ 适合于低硬化钢 (HRC45以下), 合金钢, 工具钢, 碳素钢, 预硬钢, 不锈钢等
- ▶ Ultra micro grain carbide
- ▶ Reduces chipping of corner edges
- ▶ Suitable for low hardness materials (under HRC45), alloy steels, tool steels, carbon steels, prehardened steels, stainless steels, etc




up to Ø3mm over Ø3mm



单位(Unit) : mm

型号	EDP No.		刃部直径 Mill Diameter	柄部直径 Shank Diameter	刃长 Length of Cut	全长 Overall Length
	PLAIN	FLAT				
EH911010	-	-	1.0	4	2.5	40
EH911901	EH912901	-	1.0	6	2.5	40
EH911015	-	-	1.5	4	4	40
EH911902	EH912902	-	1.5	6	4	40
EH911020	-	-	2.0	4	6	40
EH911903	EH912903	-	2.0	6	6	40
EH911025	-	-	2.5	4	8	40
EH911904	EH912904	-	2.5	6	8	40
EH911030	EH912030	-	3.0	6	8	45
EH911035	EH912035	-	3.5	6	10	45
EH911040	EH912040	-	4.0	6	11	45
EH911045	EH912045	-	4.5	6	11	45
EH911050	EH912050	-	5.0	6	13	50
EH911055	EH912055	-	5.5	6	13	50
EH911060	EH912060	-	6.0	6	13	50
EH911065	EH912065	-	6.5	8	16	60
EH911070	EH912070	-	7.0	8	16	60
EH911075	EH912075	-	7.5	8	16	60
EH911080	EH912080	-	8.0	8	19	60
EH911085	EH912085	-	8.5	10	19	70
EH911090	EH912090	-	9.0	10	19	70
EH911095	EH912095	-	9.5	10	19	70
EH911100	EH912100	-	10.0	10	22	70
EH911110	EH912110	-	11.0	12	22	75
EH911120	EH912120	-	12.0	12	26	75
EH911140	EH912140	-	14.0	16	26	85
EH911160	EH912160	-	16.0	16	32	100
EH911180	EH912180	-	18.0	16	32	100
EH911200	EH912200	-	20.0	20	38	105
EH911220	EH912220	-	22.0	20	38	105
EH911250	EH912250	-	25.0	25	45	120

刃部公差 Mill Dia. Tolerance(mm)	柄部公差 Shank Dia. Tolerance
0~-0.03	h6



◎ : 优(Excellent) ○ : 良(Good)

碳钢 Carbon Steels	合金钢 Alloy Steels	预硬钢 Prehardened Steels	硬化钢 Hardened Steels	高硬钢 High Hardened Steels	铜 Copper	石墨 Graphite	铸铁 Cast Iron	铝 Aluminum	不锈钢 Stainless Steels	钛 Titanium	镍铁合金 Inconel
~HB225	HB225~325	HRC30~40	HRC40~45 HRC45~55	HRC55~70							
○	◎	◎	○						○	○	



硬质合金, 4刃 35度螺旋角 短刃
CARBIDE, 4 FLUTE 35° HELIX SHORT LENGTH

- ▶ 超微粒硬质合金
- ▶ 减少了角边处的崩刃
- ▶ 适合于低硬化钢 (HRc45以下), 合金钢, 工具钢, 碳素钢, 预硬钢, 不锈钢等


- ▶ Ultra micro grain carbide
- ▶ Reduces chipping of corner edges
- ▶ Suitable for low hardness materials (under HRc45), alloy steels, tool steels, carbon steels, prehardened steels, stainless steels, etc



单位(Unit) : mm

型号 EDP No.		刃部直径 Mill Diameter	柄部直径 Shank Diameter	刃长 Length of Cut	全长 Overall Length
PLAIN	FLAT				
EH913020	-	2.0	4	6	40
EH913901	EH914901	2.0	6	6	40
EH913025	-	2.5	4	8	40
EH913902	EH914902	2.5	6	8	40
EH913030	EH914030	3.0	6	8	45
EH913035	EH914035	3.5	6	10	45
EH913040	EH914040	4.0	6	11	45
EH913045	EH914045	4.5	6	11	45
EH913050	EH914050	5.0	6	13	50
EH913055	EH914055	5.5	6	13	50
EH913060	EH914060	6.0	6	13	50
EH913065	EH914065	6.5	8	16	60
EH913070	EH914070	7.0	8	16	60
EH913075	EH914075	7.5	8	16	60
EH913080	EH914080	8.0	8	19	60
EH913085	EH914085	8.5	10	19	70
EH913090	EH914090	9.0	10	19	70
EH913095	EH914095	9.5	10	19	70
EH913100	EH914100	10.0	10	22	70
EH913110	EH914110	11.0	12	22	75
EH913120	EH914120	12.0	12	26	75
EH913140	EH914140	14.0	16	26	85
EH913160	EH914160	16.0	16	32	100
EH913180	EH914180	18.0	16	32	100
EH913200	EH914200	20.0	20	38	105
EH913220	EH914220	22.0	20	38	105
EH913250	EH914250	25.0	25	45	120

刃部公差 Mill Dia. Tolerance(mm)	柄部公差 Shank Dia. Tolerance
0~-0.03	h6



◎ : 优(Excellent) ○ : 良(Good)

碳钢 Carbon Steels	合金钢 Alloy Steels	预硬钢 Prehardened Steels	硬化钢 Hardened Steels		高硬钢 High Hardened Steels	铜 Copper	石墨 Graphite	铸铁 Cast Iron	铝 Aluminum	不锈钢 Stainless Steels	钛 Titanium	镍铁合金 Inconel
~HB225	HB225~325	HRc30~40	HRc40~45	HRc45~55	HRc55~70							
○	◎	◎	○							◎	◎	

HSS

CBN
END MILLS

i-Xmill
END MILLS

X5070
END MILLS

X-POWER
END MILLS

JET-POWER
END MILLS

V7 Mill INOX
END MILLS

V7 Mill STEEL
END MILLS

ALU-POWER
END MILLS

CRX S

D-POWER
END MILLS

K-2 CARBIDE
END MILLS

GENERAL
CARBIDE
END MILLS

TANK-POWER
END MILLS

GENERAL
HSS
END MILLS

MILLING
CUTTERS

TECHNICAL
DATA



硬质合金, 3&4刃 50度螺旋角 长刃
CARBIDE, 3&4 FLUTE 50° HELIX LONG LENGTH


- ▶ 超微粒硬质合金
- ▶ 减少了角边处的崩刃
- ▶ 适合于低硬化钢(HRc45以下), 合金钢, 工具钢, 碳素钢, 预硬钢, 不锈钢等
- ▶ Ultra micro grain carbide
- ▶ Reduces chipping of corner edges
- ▶ Suitable for low hardness materials(under HRc45), alloy steels, tool steels, carbon steels, prehardened steels, stainless steels, etc



单位(Unit) : mm

型号 EDP No.		刃部直径 Mill Diameter	柄部直径 Shank Diameter	刃长 Length of Cut	全长 Overall Length	刃数 No. of Flute
PLAIN	FLAT					
EH830060	EH840060	6.0	6	13	50	3
EH830080	EH840080	8.0	8	19	60	3
EH830100	EH840100	10.0	10	22	70	3
EH830120	EH840120	12.0	12	25	75	3
EH830160	EH840160	16.0	16	32	90	3
EH830180	EH840180	18.0	18	32	90	3
EH830200	EH840200	20.0	20	38	100	4
EH830250	EH840250	25.0	25	45	120	4

刃部公差 Mill Dia. Tolerance(mm)	柄部公差 Shank Dia. Tolerance
0~-0.03	h6



◎ : 优(Excellent) ○ : 良(Good)

碳钢 Carbon Steels	合金钢 Alloy Steels	预硬钢 Prehardened Steels	硬化钢 Hardened Steels		高硬钢 High Hardened Steels	铜 Copper	石墨 Graphite	铸铁 Cast Iron	铝 Aluminum	不锈钢 Stainless Steels	钛 Titanium	镍铬铁合金 Inconel
~HB225	HB225~325	HRc30~40	HRc40~45	HRc45~55	HRc55~70							
○	◎	◎	○							◎	◎	○



硬质合金, 6&8刃 45度螺旋角 长刃(正前角)
CARBIDE, 6&8 FLUTE 45° HELIX LONG LENGTH (Positive Rake Angle)


- ▶ 超微粒硬质合金
- ▶ 减少了角边处的崩刃
- ▶ 适合于低硬度钢 (HRc45以下), 合金钢, 工具钢, 碳素钢, 预硬钢, 不锈钢等
- ▶ Ultra micro grain carbide
- ▶ Reduces chipping of corner edges
- ▶ Suitable for low hardness materials (under HRc45), alloy steels, tool steels, carbon steels, prehardened steels, stainless steels, etc



单位(Unit) : mm

型号 EDP No.		刃部直径 Mill Diameter	柄部直径 Shank Diameter	刃长 Length of Cut	全长 Overall Length	刃数 No. of Flute
PLAIN	FLAT					
EH915060	EH916060	6.0	6	13	57	6
EH915070	EH916070	7.0	8	16	63	6
EH915080	EH916080	8.0	8	19	63	6
EH915090	EH916090	9.0	10	19	72	6
EH915100	EH916100	10.0	10	22	72	6
EH915120	EH916120	12.0	12	26	83	6
EH915140	EH916140	14.0	14	26	83	6
EH915160	EH916160	16.0	16	32	92	6
EH915180	EH916180	18.0	18	32	92	8
EH915200	EH916200	20.0	20	38	104	8
EH915250	EH916250	25.0	25	44	104	8

刃部公差 Mill Dia. Tolerance(mm)	柄部公差 Shank Dia. Tolerance
0~-0.03	h6



◎ : 优(Excellent) ○ : 良(Good)

碳钢	合金钢	预硬钢	硬化钢		高硬钢	铜	石墨	铸铁	铝	不锈钢	钛	镍铁合金
Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels		High Hardened Steels	Copper	Graphite	Cast Iron	Aluminum	Stainless Steels	Titanium	Inconel
~HB225	HB225~325	HRc30~40	HRc40~45	HRc45~55	HRc55~70							
○	◎	◎	○							◎	◎	○

HSS

CBN
END MILLS

i-Xmill
END MILLS

X5070
END MILLS

X-POWER
END MILLS

JET-POWER
END MILLS

V7 Mill INOX
END MILLS

V7 Mill STEEL
END MILLS

ALU-POWER
END MILLS

CRX S

D-POWER
END MILLS

K-2 CARBIDE
END MILLS

GENERAL
CARBIDE
END MILLS

TANK-POWER
END MILLS


GENERAL
HSS
END MILLS

MILLING
CUTTERS

TECHNICAL
DATA

粉末高速钢, 4&6刃 短刃
PREMIUM HSS-PM, 4&6 FLUTE SHORT LENGTH

- ▶ 在加工低硬度材料(HRC45以下), 合金钢, 工具钢, 碳素钢, 预硬钢, 不锈钢, 钛, 镍时具有卓越的性能
- ▶ 高化学稳定性防止积屑瘤, 微小裂纹凹坑形成
- ▶ 较高的表面粗糙度
- ▶ Excellent performance on Low hardness materials (under HRC45), alloy steels, tool steels, carbon steels, prehardened steels, Stainless Steel, Titanium, Inconel.
- ▶ High chemical stability prevents built-up edge, micro cracks and crater wear.
- ▶ Superior workpiece finish.



YPM 4&6 30° FLAT P.709

单位(Unit) : mm

型号 EDP No. FLAT	刃部直径 Mill Diameter	柄部直径 Shank Diameter	刃长 Length of Cut	全长 Overall Length	刃数 No. of Flute
EE515030	3.0	6	8	52	4
EE515040	4.0	6	11	55	4
EE515050	5.0	6	13	57	4
EE515060	6.0	6	13	57	4
EE515080	8.0	10	19	69	4
EE515100	10.0	10	22	72	4
EE515120	12.0	12	26	83	4
EE515140	14.0	12	26	83	4
EE515160	16.0	16	32	92	6
EE515180	18.0	16	32	92	6
EE515200	20.0	20	38	104	6
EE515250	25.0	25	45	121	6

刃部公差 Mill Dia. Tolerance(mm)	柄部公差 Shank Dia. Tolerance
0~+0.03	h6

CBN END MILLS

i-Xmill END MILLS

X5070 END MILLS

X-POWER END MILLS

JET-POWER END MILLS

V7 Mill INOX END MILLS

V7 Mill STEEL END MILLS

ALU-POWER END MILLS

CRX S

D-POWER END MILLS

K-2 CARBIDE END MILLS

GENERAL CARBIDE END MILLS

TANK-POWER END MILLS

GENERAL HSS END MILLS

MILLING CUTTERS

TECHNICAL DATA

◎ : 优(Excellent) ○ : 良(Good)

碳钢 Carbon Steels	合金钢 Alloy Steels	预硬钢 Prehardened Steels	硬化钢 Hardened Steels		高硬钢 High Hardened Steels	铜 Copper	石墨 Graphite	铸铁 Cast Iron	铝 Aluminum	不锈钢 Stainless Steels	钛 Titanium	镍铬铁合金 Inconel
~HB225	HB225~325	HRc30~40	HRc40~45	HRc45~55	HRc55~70							
○	◎	◎	○							◎	◎	○

硬质合金, 多刃 短刃 粗加工 - 细螺紋
CARBIDE, MULTI FLUTE SHORT LENGTH ROUGHING - FINE

- ▶ 适合于低硬度钢(HRC45以下), 合金钢, 工具钢, 碳素钢, 预硬钢, 不锈钢等
- ▶ 高速铣削
- ▶ 快速排屑
- ▶ Suitable for low hardness materials(under HRC45), alloy steels, tool steels, carbon steels, prehardened steels, stainless steels, etc
- ▶ High velocity milling operation.
- ▶ Fast chip ejection.



MG HM FINE 3-5 30° PLAIN FLAT P.710

单位(Unit) : mm

型号 EDP No.		刃部直径 Mill Diameter	柄部直径 Shank Diameter	刃长 Length of Cut	全长 Overall Length	刃数 No. of Flute
PLAIN	FLAT	h10	h6			
EH852060	EH862060	6.0	6	7	54	3
EH852070	EH862070	7.0	8	8	58	3
EH852080	EH862080	8.0	8	9	58	3
EH852090	EH862090	9.0	10	13	66	4
EH852100	EH862100	10.0	10	14	66	4
EH852120	EH862120	12.0	12	16	73	4
EH852140	EH862140	14.0	14	18	75	4
EH852160	EH862160	16.0	16	22	82	4
EH852180	EH862180	18.0	18	24	84	4
EH852200	EH862200	20.0	20	26	92	4
EH852250	EH862250	25.0	25	25	110	5

DIN 7160 & 7161规定的精度
Tolerances according to DIN 7160 & 7161

精度范围单位 / Tolerance range in μ m					
公称直径单位 / Nominal-Diameter in mm					
	from 1 to 3	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30
h10	0 - 40	0 - 48	0 - 58	0 - 70	0 - 84
h6	0 - 6	0 - 8	0 - 9	0 - 11	0 - 13

◎ : 优(Excellent) ○ : 良(Good)


碳钢	合金钢	预硬钢	硬化钢		高硬钢	铜	石墨	铸铁	铝	不锈钢	钛	钴镍铁合金
Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels		High Hardened Steels	Copper	Graphite	Cast Iron	Aluminum	Stainless Steels	Titanium	Inconel
~HB225	HB225~325	HRC30~40	HRC40~45	HRC45~55	HRC55~70							
○	◎	◎	○							◎	◎	○

- CBN END MILLS
- i-Xmill END MILLS
- X5070 END MILLS
- X-POWER END MILLS
- JET-POWER END MILLS
- V7 Mill INOX END MILLS
- V7 Mill STEEL END MILLS
- ALU-POWER END MILLS
- CRX S
- D-POWER END MILLS
- K-2 CARBIDE END MILLS
- GENERAL CARBIDE END MILLS
- TANK-POWER END MILLS
- GENERAL HSS END MILLS
- MILLING CUTTERS
- TECHNICAL DATA



硬质合金, 多刃 长刃 粗加工 - 细螺纹
CARBIDE, MULTI FLUTE LONG LENGTH ROUGHING - FINE

- ▶ 比EH852,EH862更长的沟槽
- ▶ 适合于低硬化钢(HRC45以下), 合金钢, 工具钢, 碳素钢, 预硬钢, 不锈钢等
- ▶ 高速铣削
- ▶ 快速排屑
- ▶ Longer flute length than EH852, EH862.
- ▶ Suitable for low hardness materials(under HRC45), alloy steels, tool steels, carbon steels, prehardened steels, stainless steels, etc.
- ▶ High velocity milling operation.
- ▶ Fast chip ejection.



单位(Unit) : mm

型号 EDP No.		刃部直径 Mill Diameter	柄部直径 Shank Diameter	刃长 Length of Cut	全长 Overall Length	刃数 No. of Flute
PLAIN	FLAT	h10	h6			
EH831060	EH841060	6.0	6	16	57	3
EH831070	EH841070	7.0	8	16	63	3
EH831080	EH841080	8.0	8	16	63	3
EH831090	EH841090	9.0	10	19	72	4
EH831100	EH841100	10.0	10	22	72	4
EH831120	EH841120	12.0	12	26	83	4
EH831140	EH841140	14.0	14	26	83	4
EH831160	EH841160	16.0	16	32	92	4
EH831180	EH841180	18.0	18	32	92	4
EH831200	EH841200	20.0	20	38	104	4
EH831250	EH841250	25.0	25	45	121	5

DIN 7160 & 7161规定的精度
Tolerances according to DIN 7160 & 7161

精度范围单位 / Tolerance range in μm					
公称直径单位 / Nominal-Diameter in mm					
	from 1 to 3	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30
h10	0 - 40	0 - 48	0 - 58	0 - 70	0 - 84
h6	0 - 6	0 - 8	0 - 9	0 - 11	0 - 13

碳钢	合金钢	预硬钢	硬化钢		高硬钢	铜	石墨	铸铁	铝	不锈钢	钛	镍铬铁合金
Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels		High Hardened Steels	Copper	Graphite	Cast Iron	Aluminum	Stainless Steels	Titanium	Inconel
~HB225	HB225~325	HRC30~40	HRC40~45	HRC45~55	HRC55~70							
○	◎	◎	○							◎	◎	○



硬质合金, 多刃 45度螺旋角 短型 粗加工 - 细螺纹
 CARBIDE, MULTI FLUTE 45° HELIX SHORT LENGTH ROUGHING - FINE

- ▶ 超微粒硬质合金
- ▶ 很高的排屑性可以减少切削刃的破损。
- ▶ 适合于低硬化钢 (HRc45以下), 合金钢, 工具钢, 碳素钢, 预硬钢, 不锈钢等

- ▶ Ultra micro grain carbide
- ▶ High chip removal and minimizing breakages of cutting edges.
- ▶ Suitable for low hardness materials (under HRc45), alloy steels, tool steels, carbon steels, prehardened steels, stainless steels, etc.




单位(Unit) : mm

型号 EDP No.		刃部直径 Mill Diameter	柄部直径 Shank Diameter	刃长 Length of Cut	全长 Overall Length	刃数 No. of Flute
PLAIN	FLAT	h10	h6			
EH917060	EH918060	6.0	6	7	54	4
EH917080	EH918080	8.0	8	9	58	4
EH917100	EH918100	10.0	10	14	66	4
EH917120	EH918120	12.0	12	16	73	4
EH917160	EH918160	16.0	16	22	82	5
EH917200	EH918200	20.0	20	26	92	6

DIN 7160 & 7161规定的精度
 Tolerances according to DIN 7160 & 7161

精度范围单位 / Tolerance range in μ m					
公称直径单位 / Nominal-Diameter in mm					
	from 1 to 3	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30
h10	0 - 40	0 - 48	0 - 58	0 - 70	0 - 84
h6	0 - 6	0 - 8	0 - 9	0 - 11	0 - 13



◎ : 优 (Excellent) ○ : 良 (Good)

碳钢	合金钢	预硬钢	硬化钢		高硬钢	铜	石墨	铸铁	铝	不锈钢	钛	镍铁合金
Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels		High Hardened Steels	Copper	Graphite	Cast Iron	Aluminum	Stainless Steels	Titanium	Inconel
~HB225	HB225~325	HRc30~40	HRc40~45	HRc45~55	HRc55~70							
○	◎	◎	○							◎	◎	○

HSS

CBN
END MILLS

i-Xmill
END MILLS

X5070
END MILLS

X-POWER
END MILLS

JET-POWER
END MILLS

V7 Mill INOX
END MILLS

V7 Mill STEEL
END MILLS

ALU-POWER
END MILLS

CRX S

D-POWER
END MILLS

K-2 CARBIDE
END MILLS

GENERAL
CARBIDE
END MILLS

TANK-POWER
END MILLS

GENERAL
HSS
END MILLS

MILLING
CUTTERS

TECHNICAL
DATA

CARBIDE

HSS

CBN
END MILLS

i-Xmill
END MILLS

X5070
END MILLS

X-POWER
END MILLS

JET-POWER
END MILLS

V7 Mill INOX
END MILLS

V7 Mill STEEL
END MILLS

ALU-POWER
END MILLS

CRX S

D-POWER
END MILLS

K-2 CARBIDE
END MILLS

GENERAL
CARBIDE
END MILLS

TANK-POWER
END MILLS

GENERAL
HSS
END MILLS

MILLING
CUTTERS

TECHNICAL
DATA



硬质合金, 多刃 45度螺旋角 长刃 粗加工 - 细螺纹
CARBIDE, MULTI FLUTE 45° HELIX LONG LENGTH ROUGHING - FINE

- ▶ 超微粒硬质合金
- ▶ 很高的排屑性可以减少切削刃的破损。
- ▶ 适合于低硬化钢 (HRc45以下), 合金钢, 工具钢, 碳素钢, 预硬钢, 不锈钢等
- ▶ Ultra micro grain carbide
- ▶ High chip removal and minimizing breakages of cutting edges.
- ▶ Suitable for low hardness materials (under HRc45), alloy steels, tool steels, carbon steels, prehardened steels, stainless steels, etc.




单位(Unit) : mm

型号 EDP No.		刃部直径 Mill Diameter	柄部直径 Shank Diameter	刃长 Length of Cut	全长 Overall Length	刃数 No. of Flute
PLAIN	FLAT	h10	h6			
EH919040	EH920040	4.0	6	11	57	3
EH919050	EH920050	5.0	6	13	57	4
EH919060	EH920060	6.0	6	16	57	4
EH919070	EH920070	7.0	8	16	63	4
EH919080	EH920080	8.0	8	16	63	4
EH919090	EH920090	9.0	10	19	72	4
EH919100	EH920100	10.0	10	22	72	4
EH919120	EH920120	12.0	12	26	83	4
EH919140	EH920140	14.0	14	26	83	5
EH919160	EH920160	16.0	16	32	92	5
EH919200	EH920200	20.0	20	38	104	6
EH919250	EH920250	25.0	25	45	121	6

DIN 7160 & 7161规定的精度
 Tolerances according to DIN 7160 & 7161

精度范围单位 / Tolerance range in μm					
公称直径单位 / Nominal-Diameter in mm					
	from 1 to 3	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30
h10	0 - 40	0 - 48	0 - 58	0 - 70	0 - 84
h6	0 - 6	0 - 8	0 - 9	0 - 11	0 - 13





碳素钢	合金钢	预硬钢	硬化钢		高硬钢	铜	石墨	铸铁	铝	不锈钢	钛	镍铬铁合金
Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels		High Hardened Steels	Copper	Graphite	Cast Iron	Aluminum	Stainless Steels	Titanium	Inconel
~HB225	HB225~325	HRc30~40	HRc40~45	HRc45~55	HRc55~70							
○	◎	◎	○							◎	◎	○



硬质合金, 多刃 45度螺旋角 长刃 粗加工 - 细螺纹
 CARBIDE, MULTI FLUTE 45° HELIX LONG REACH ROUGHING - FINE

- ▶ 超微粒硬质合金
- ▶ 很高的排屑性可以减少切削刃的破损。
- ▶ 适合于低硬化钢 (HRc45以下), 合金钢, 工具钢, 碳素钢, 预硬钢, 不锈钢等

- ▶ Ultra micro grain carbide
- ▶ High chip removal and minimizing breakages of cutting edges.
- ▶ Suitable for low hardness materials (under HRc45), alloy steels, tool steels, carbon steels, prehardened steels, stainless steels, etc.

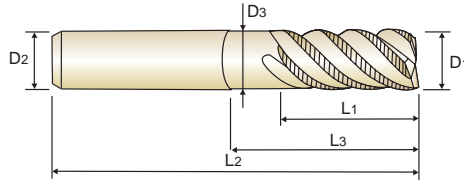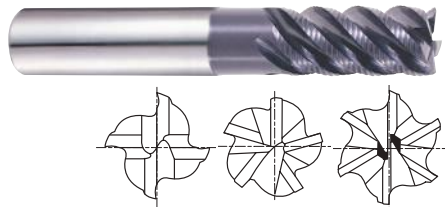


单位(Unit) : mm

型号 EDP No.		刃部直径 Mill Diameter D1(h10)	柄部直径 Shank Diameter D2(h6)	刃长 Length of Cut L1	颈长 Length Below Shank L3	全长 Overall Length L2	颈径 Neck Diameter D3	刃数 No. of Flute
PLAIN	FLAT							
EH921060	EH942060	6.0	6	16	20	57	5.5	4
EH921080	EH942080	8.0	8	16	26	63	7.5	4
EH921100	EH942100	10.0	10	22	31	72	9.5	4
EH921120	EH942120	12.0	12	26	37	83	11.5	4
EH921160	EH942160	16.0	16	32	51	100	15.5	5
EH921200	EH942200	20.0	20	38	59	110	19.2	6

DIN 7160 & 7161规定的精度
 Tolerances according to DIN 7160 & 7161

精度范围单位 / Tolerance range in μ m					
公称直径单位 / Nominal-Diameter in mm					
	from 1 to 3	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30
h10	0 - 40	0 - 48	0 - 58	0 - 70	0 - 84
h6	0 - 6	0 - 8	0 - 9	0 - 11	0 - 13



◎ : 优 (Excellent) ○ : 良 (Good)

碳钢 Carbon Steels	合金钢 Alloy Steels	预硬钢 Prehardened Steels	硬化钢 Hardened Steels		高硬钢 High Hardened Steels	铜 Copper	石墨 Graphite	铸铁 Cast Iron	铝 Aluminum	不锈钢 Stainless Steels	钛 Titanium	镍铁合金 Inconel
-HB225	HB225~325	HRc30~40	HRc40~45	HRc45~55	HRc55~70							
○	◎	◎	○							◎	◎	○

HSS

CBN END MILLS

i-Xmill END MILLS

X5070 END MILLS

X-POWER END MILLS

JET-POWER END MILLS

V7 Mill INOX END MILLS

V7 Mill STEEL END MILLS

ALU-POWER END MILLS

CRX S

D-POWER END MILLS

K-2 CARBIDE END MILLS

GENERAL CARBIDE END MILLS

TANK-POWER END MILLS

GENERAL HSS END MILLS

MILLING CUTTERS

TECHNICAL DATA




推荐的切削条件
RECOMMENDED CUTTING CONDITIONS

硬质合金, 2刃 短刃 - 开槽
CARBIDE, 2 FLUTE SHORT - SLOTTING

EH911, EH912 SERIES

材质	碳钢, 合金钢, 工具钢		碳钢, 合金钢, 工具钢		不锈钢, 钛合金	
MATERIAL	CARBON STEELS ALLOY STEELS TOOL STEELS		CARBON STEELS ALLOY STEELS TOOL STEELS		STAINLESS STEELS TITANIUM ALLOY	
HARDNESS	~ HRC30		HRc30 ~ HRc45			
STRENGTH	1000N/mm ²		1000 ~ 1500N/mm ²			
DIAMETER	RPM	FEED	RPM	FEED		
2.0	11560	190	7560	120	6300	90
3.0	8920	210	5560	140	4620	120
4.0	7560	300	4620	180	3880	150
5.0	6300	320	3780	190	3160	160
6.0	5560	350	3360	220	2840	180
8.0	4200	380	2520	200	2100	180
10.0	3260	330	2000	160	1680	160
12.0	2740	280	1680	130	1360	130
16.0	2200	220	1360	110	1060	110
20.0	1680	170	1060	80	840	80
25.0	1360	130	840	70	680	60




RPM = rev./min. (转速/分钟)
FEED = mm/min. (进给量)

硬质合金, 4刃 短刃 - 侧铣
CARBIDE, 4 FLUTE SHORT - SIDE CUTTING

EH913, EH914 SERIES

材质	碳钢, 合金钢, 工具钢		碳钢, 合金钢, 工具钢		不锈钢, 钛合金	
MATERIAL	CARBON STEELS ALLOY STEELS TOOL STEELS		CARBON STEELS ALLOY STEELS TOOL STEELS		STAINLESS STEELS TITANIUM ALLOY	
HARDNESS	~ HRC30		HRc30 ~ HRc45			
STRENGTH	1000N/mm ²		1000 ~ 1500N/mm ²			
DIAMETER	RPM	FEED	RPM	FEED		
2.0	11560	280	7560	170	6300	140
3.0	8920	320	5560	200	4620	170
4.0	7560	570	4620	350	3880	280
5.0	6300	600	3780	360	3160	300
6.0	5560	660	3360	410	2840	330
8.0	4200	710	2520	380	2100	350
10.0	3260	610	2000	300	1680	300
12.0	2740	520	1680	250	1360	240
16.0	2200	410	1360	200	1060	200
20.0	1680	320	1060	160	840	150
25.0	1360	250	840	130	680	120



RPM = rev./min. (转速/分钟)
FEED = mm/min. (进给量)

CBN
END MILLS

i-Xmill
END MILLS

X5070
END MILLS

X-POWER
END MILLS

JET-POWER
END MILLS

V7 Mill INOX
END MILLS

V7 Mill STEEL
END MILLS

ALU-POWER
END MILLS

CRX S

D-POWER
END MILLS

K-2 CARBIDE
END MILLS

GENERAL
CARBIDE
END MILLS

TANK-POWER
END MILLS



GENERAL
HSS
END MILLS

MILLING
CUTTERS

TECHNICAL
DATA




硬质合金, 3&4刃 50度螺旋角 长刃 - 开槽
CARBIDE, 3&4 FLUTE 50° HELIX LONG - SLOTTING
EH830, EH840 SERIES

材质	碳钢, 合金钢, 工具钢		碳钢, 合金钢, 工具钢		不锈钢, 钛合金		石墨	
MATERIAL	CARBON STEELS ALLOY STEELS TOOL STEELS		CARBON STEELS ALLOY STEELS TOOL STEELS		STAINLESS STEELS TITANIUM ALLOY		INCONEL	
HARDNESS	~ HRC30		HRC30 ~ HRC45					
STRENGTH	1000N/mm ²		1000 ~ 1500N/mm ²					
DIAMETER	RPM	FEED	RPM	FEED	RPM	FEED	RPM	FEED
6.0	5560	310	3360	200	2840	160	1160	40
8.0	4200	340	2520	180	2100	160	840	40
10.0	3260	300	2000	140	1680	140	670	40
12.0	2740	250	1680	120	1370	120	560	30
16.0	2200	200	1360	100	1050	100	420	25
18.0	1940	175	1210	85	950	85	370	20
20.0	1680	150	1060	70	840	70	320	20
25.0	1360	115	840	60	670	60	270	15


 RPM = rev./min. (转速/分钟)
 FEED = mm/min. (进给量)

硬质合金, 3&4刃 50°螺旋角 长刃 - 侧铣
CARBIDE, 3&4 FLUTE 50° HELIX - SIDE CUTTING
EH830, EH840 SERIES

材质	碳钢, 合金钢, 工具钢		碳钢, 合金钢, 工具钢		不锈钢, 钛合金		石墨	
MATERIAL	CARBON STEELS ALLOY STEELS TOOL STEELS		CARBON STEELS ALLOY STEELS TOOL STEELS		STAINLESS STEELS TITANIUM ALLOY		INCONEL	
HARDNESS	~ HRC30		HRC30 ~ HRC45					
STRENGTH	1000N/mm ²		1000 ~ 1500N/mm ²					
DIAMETER	RPM	FEED	RPM	FEED	RPM	FEED	RPM	FEED
6.0	5560	400	3360	250	2840	250	1050	55
8.0	4200	420	2520	230	2100	265	840	50
10.0	3260	370	2000	180	1680	230	680	50
12.0	2740	310	1680	150	1370	180	560	45
16.0	2200	250	1360	120	1050	150	420	35
18.0	1940	220	1210	110	950	130	370	30
20.0	1680	190	1060	95	840	115	340	30
25.0	1360	150	840	75	670	90	270	25


 RPM = rev./min. (转速/分钟)
 FEED = mm/min. (进给量)






硬质合金, 6&8刃 45度螺旋角 长刃 - 侧铣

CARBIDE, 6&8 FLUTE 45° HELIX LONG - SIDE CUTTING

EH915, EH916 SERIES

■ 正常速度 / NORMAL SPEED



材质	碳钢, 合金钢, 工具钢		碳钢, 合金钢, 工具钢		不锈钢, 钛合金		石墨	
MATERIAL	CARBON STEELS ALLOY STEELS TOOL STEELS		CARBON STEELS ALLOY STEELS TOOL STEELS		STAINLESS STEELS TITANIUM ALLOY		INCONEL	
HARDNESS	~ HRC30		HRC30 ~ HRC45					
STRENGTH	1000N/mm ²		1000 ~ 1500N/mm ²					
DIAMETER	RPM	FEED	RPM	FEED	RPM	FEED	RPM	FEED
6.0	5560	2000	3880	1370	3370	1100	1350	280
8.0	4200	2000	2940	1370	2490	1100	1000	280
10.0	3360	2000	2320	1370	1920	1100	440	280
12.0	2840	1680	2000	1160	1610	1000	400	250
16.0	2100	1260	1480	880	1160	770	310	190
20.0	1680	1010	1160	690	900	620	250	155
25.0	1500	900	1100	600	850	540	220	135



RPM = rev./min. (转速/分钟)
FEED = mm/min. (进给量)

■ 高速 / HIGH SPEED



材质	碳钢, 合金钢, 工具钢		碳钢, 合金钢, 工具钢	
MATERIAL	CARBON STEELS ALLOY STEELS TOOL STEELS		CARBON STEELS ALLOY STEELS TOOL STEELS	
HARDNESS	~ HRC30		HRC30 ~ HRC45	
STRENGTH	1000N/mm ²		1000 ~ 1500N/mm ²	
DIAMETER	RPM	FEED	RPM	FEED
6.0	22200	8000	16800	6090
8.0	16800	8000	12600	6090
10.0	13400	8000	9980	5990
12.0	11350	6720	8400	5040
16.0	8400	5040	6300	3780
20.0	6700	4040	5040	3050
25.0	6000	3600	4500	2700



RPM = rev./min. (转速/分钟)
FEED = mm/min. (进给量)

粉末高速钢, 4&6刃 短刃 - 侧铣
PREMIUM HSS-PM, 4&6 FLUTE SHORT- SIDE CUTTING
EE515 SERIES

材质	碳钢, 合金钢, 工具钢		碳钢, 合金钢, 工具钢		不锈钢, 钛合金		石墨	
MATERIAL	CARBON STEELS ALLOY STEELS TOOL STEELS		CARBON STEELS ALLOY STEELS TOOL STEELS		STAINLESS STEELS TITANIUM ALLOY		INCONEL	
HARDNESS	~ HRC30		HRC30 ~ HRC45					
DIAMETER	RPM	FEED	RPM	FEED	RPM	FEED	RPM	FEED
3.0	4400	185	1100	23	2200	110	880	28
4.0	3600	210	900	31	1800	125	720	37
5.0	3000	225	750	30	1500	135	600	36
6.0	2600	235	600	29	1300	140	480	35
8.0	2000	250	500	28	1000	150	400	34
10.0	1600	285	410	30	800	170	330	36
12.0	1320	250	340	29	660	150	270	35
14.0	1160	235	290	27	580	140	230	32
16.0	1000	225	250	26	500	135	200	31
18.0	900	210	225	23	450	125	180	28
20.0	800	200	200	17	400	120	160	21
25.0	640	165	165	15	320	100	130	18



RPM = rev./min. (转速/分钟)
FEED = mm/min. (进给量)

CBN
END MILLSi-Xmill
END MILLSX5070
END MILLSX-POWER
END MILLSJET-POWER
END MILLSV7 Mill INOX
END MILLSV7 Mill STEEL
END MILLSALU-POWER
END MILLS

CRX S

D-POWER
END MILLSK-2 CARBIDE
END MILLSGENERAL
CARBIDE
END MILLSTANK-POWER
END MILLSGENERAL
HSS
END MILLSMILLING
CUTTERSTECHNICAL
DATA



**JET-POWER
END MILLS**

推荐的切削条件


RECOMMENDED CUTTING CONDITIONS

硬质合金, 多刃 粗加工 - 开槽



CARBIDE, MULTI FLUTE ROUGHING - SLOTTING

EH917, EH918, EH919, EH920, EH921, EH942, EH852, EH862, EH831, EH841 SERIES

材质	碳钢, 合金钢, 工具钢		碳钢, 合金钢, 工具钢		不锈钢, 钛合金		石墨	
MATERIAL	CARBON STEELS ALLOY STEELS TOOL STEELS		CARBON STEELS ALLOY STEELS TOOL STEELS		STAINLESS STEELS TITANIUM ALLOY		INCONEL	
HARDNESS	~ HRC30		HRC30 ~ HRC45					
STRENGTH	1000N/mm ²		1000 ~ 1500N/mm ²					
DIAMETER	RPM	FEED	RPM	FEED	RPM	FEED	RPM	FEED
4.0	23400	2320	18600	840	12600	570	3600	190
6.0	15600	2320	12400	840	8400	570	2400	190
8.0	11600	2320	9200	840	6300	570	1800	180
10.0	9200	2320	7600	840	5100	570	1300	190
12.0	8000	2400	6000	800	4200	570	1200	190
14.0	6800	2400	5200	840	3600	570	900	130
16.0	6000	2400	4800	760	3300	510	800	110
18.0	5200	2320	4400	720	2700	420	700	100
20.0	4800	2160	3600	560	2400	360	660	100
25.0	4300	2150	3200	620	2160	410	600	110



A: $\varnothing 4\text{-}\varnothing 10: 0.25 \times D$
 $\varnothing 12\text{-}\varnothing 16: 0.15 \times D$
 $\varnothing 18\text{-}\varnothing 25: 0.10 \times D$



* 对长和超长型进给应减少约50%
 The FEED, in long & long reach types, should be reduced by around 50%


RPM = rev./min. (转速/分钟)
 FEED = mm/min. (进给量)

硬质合金, 多刃 粗加工 - 侧铣



CARBIDE, MULTI FLUTE ROUGHING - SIDE CUTTING

EH917, EH918, EH919, EH920, EH921, EH942, EH852, EH862, EH831, EH841 SERIES

材质	碳钢, 合金钢, 工具钢		碳钢, 合金钢, 工具钢		不锈钢, 钛合金		石墨	
MATERIAL	CARBON STEELS ALLOY STEELS TOOL STEELS		CARBON STEELS ALLOY STEELS TOOL STEELS		STAINLESS STEELS TITANIUM ALLOY		INCONEL	
HARDNESS	~ HRC30		HRC30 ~ HRC45					
STRENGTH	1000N/mm ²		1000 ~ 1500N/mm ²					
DIAMETER	RPM	FEED	RPM	FEED	RPM	FEED	RPM	FEED
4.0	23400	2320	18600	840	12600	570	3600	190
6.0	15600	2320	12400	840	8400	570	2400	190
8.0	11600	2320	9200	840	6300	570	1800	180
10.0	9200	2320	7600	840	5100	570	1300	190
12.0	8000	2400	6000	800	4200	570	1200	190
14.0	6800	2400	5200	840	3600	570	900	130
16.0	6000	2400	4800	760	3300	510	800	110
18.0	5200	2320	4400	720	2700	420	700	100
20.0	4800	2160	3600	560	2400	360	660	100
25.0	4300	2150	3200	620	2160	410	600	110



A: $\varnothing 4\text{-}\varnothing 10: 0.15 \times D$
 $\varnothing 12\text{-}\varnothing 16: 0.10 \times D$
 $\varnothing 18\text{-}\varnothing 25: 0.05 \times D$



* 对长和超长型进给应减少约50%
 The FEED, in long & long reach types, should be reduced by around 50%

RPM = rev./min. (转速/分钟)
 FEED = mm/min. (进给量)